
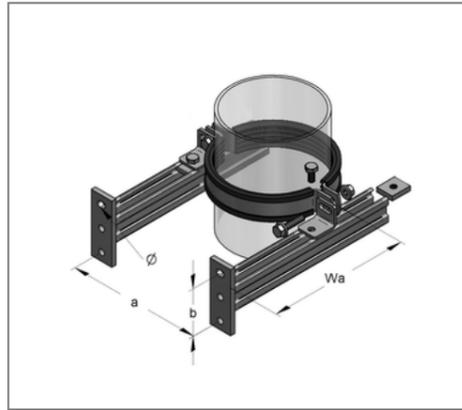


## ■ Fixpoint support for downstream piping Set SML DN 80 / 83 mm Wall distance 75 - 260 mm

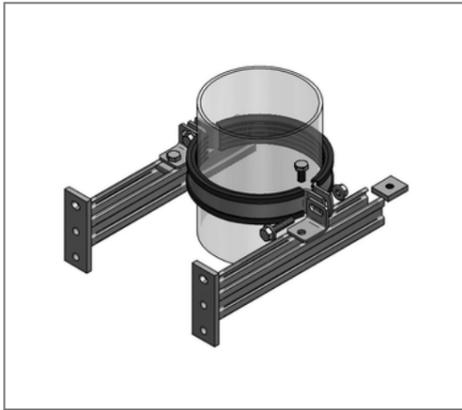

### Commercial details

Part no.	4500800
EAN/GTIN	4250928439536
Packing unit	1 pcs
Quantity unit	pcs
Weight	1,63 kg/pc
Product group	03-450
Price unit	1

### QR code



### Certification



### Specification

Application Brackets for the manufacture of a support for area sewage downpipes.

### Technical data

Material	Steel
Surface	galvanized
Corrosion category	C2 very high
Surrounding area	Indoor area
Sound insulation lining	TPE
min. temperature resistance	-35 °C
max. temperature resistance	100 °C
Thickness material sound insulation lining	6 mm
Class	B2
Colour sound insulation lining	black
Material C-profile	S250JR

### Product details

Outer pipe diameter	83 mm
Nominal pipe diameter	80 mm
Hole distance b	55 mm
Length console	263 mm
Load F1	1,44 kN
Load F2	0,72 kN
Console type	C-profile 35/21

## Product details

Screw type	M10x20
Pipe clamp type	Maxima PSM
Distance measure a	140 mm
Type distance angle	Distance angle single 42x35x4
Type of threaded plate	M10 35x30
max. wall distance Wa	260 mm
min. wall distance Wa	75 mm
Elongated hole	11x15 mm