


Insulated pipe clamp Polar Plus 108 mm Insulation 40 M10/M12

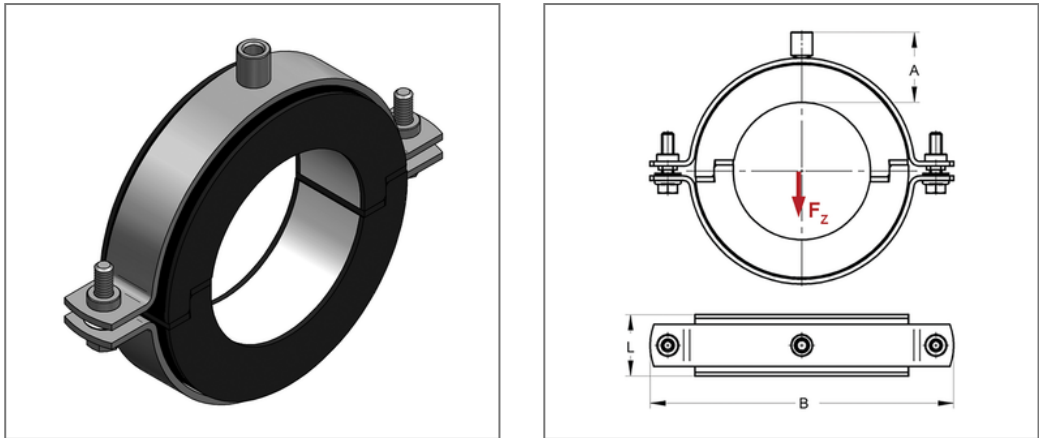

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 74641080      |
| EAN/GTIN      | 4250928442871 |
| Packing unit  | 10 pcs        |
| Quantity unit | pcs           |
| Weight        | 1,06 kg/pc    |
| Product group | 06-746        |
| Price unit    | 1             |

QR code



Certification



Specification

|                  |                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application area | A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping. |
| Insulation body  | AC/PU                                                                                                                                                                                 |

Technical data

|                                   |              |
|-----------------------------------|--------------|
| Material                          | Steel        |
| Material type                     | S235         |
| Surface                           | galvanized   |
| Corrosion category                | C2 very high |
| Surrounding area                  | Indoor area  |
| Class                             | B2           |
| min. temperature resistance       | -50 °C       |
| max. temperature resistance       | 105 °C       |
| Thermal conductivity              | 0,03 W/mK    |
| Density shell                     | 145 kg/m³    |
| Water vapour diffusion resistance | 36000 µ      |

Product details

|                      |            |
|----------------------|------------|
| Connection           | M10/M12    |
| Connection height A  | 67 mm      |
| Width B              | 265 mm     |
| Insulation thickness | 40 mm      |
| Load Fz              | 1,68 kN    |
| Length shell L       | 51 mm      |
| Statical load shell  | 0,38 N/mm² |

Remark

|        |                                                               |
|--------|---------------------------------------------------------------|
| Notice | exchange and returns are excluded. Special design on request. |
| Note   | delivery time on demand                                       |