


■ Insulated pipe clamp Husky II 13 33,7 mm Insulation 13,7 M8/M10



Commercial details

| | |
|---------------|---------------|
| Part no. | 6830340 |
| EAN/GTIN | 4250928440457 |
| Packing unit | 12 pcs |
| Quantity unit | pcs |
| Weight | 0,105 kg/pc |
| Product group | 06-683 |
| Price unit | 1 |

QR code

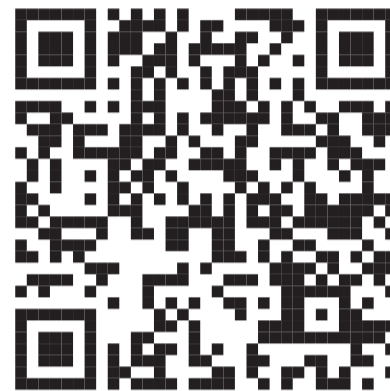

Certification



Specification

| | |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application area | A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping. |
| Insulation body | KA/PU |

Technical data

| | |
|-----------------------------------|-----------------------|
| Material | Steel |
| Material type | DD11 |
| Material coat | Plastic |
| Surface | galvanized |
| Corrosion category | C2 very high |
| Surrounding area | Indoor area |
| Class | B2 |
| min. temperature resistance | -45 °C |
| max. temperature resistance | 105 °C |
| Thermal conductivity | 0,029 W/mK |
| Density shell | 120 kg/m ³ |
| Water vapour diffusion resistance | 20000 μ |

Product details

| | |
|----------------------|------------------------|
| Connection | M8/M10 |
| Connection height A | 33 mm |
| Width B | 102 mm |
| Insulation thickness | 13,7 mm |
| Load F _z | 0,23 kN |
| Length shell L | 36 mm |
| Statical load shell | 0,27 N/mm ² |

Remark

Notice exchange and returns are excluded. Special design on request.