


■ Insulated pipe clamp Husky VI 32 17,2 mm Insulation 29,5 M8/M10

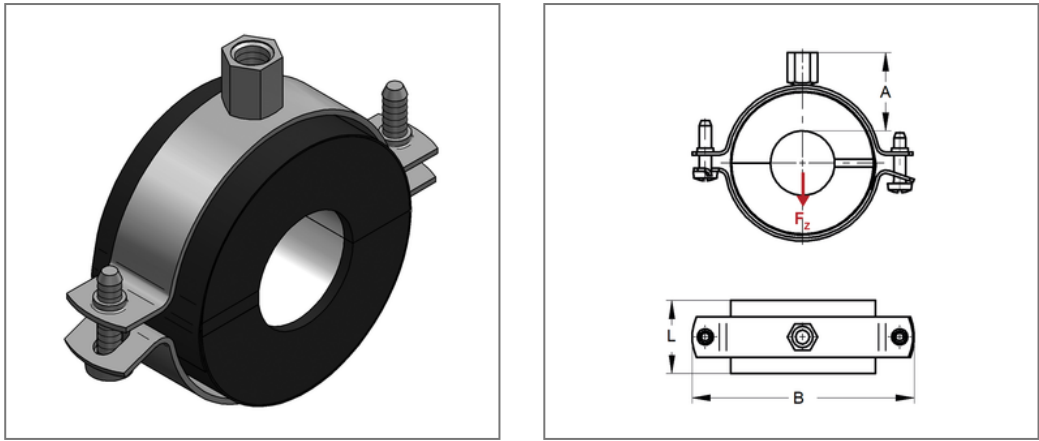

Commercial details

Part no.	6850180
EAN/GTIN	4250928440976
Packing unit	12 pcs
Quantity unit	pcs
Weight	0,152 kg/pc
Product group	06-685
Price unit	1

QR code



Certification



Specification

Application area	A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping
Insulation body	KA/PU

Technical data

Material	Steel
Material type	DD11
Material coat	Plastic
Surface	galvanized
Class	B2
min. temperature resistance	-45 °C
max. temperature resistance	105 °C
Thermal conductivity	0,029 W/mK
Density shell	120 kg/m³
Water vapour diffusion resistance	20000 µ

Product details

Connection	M8/M10
Connection height A	49 mm
Width B	121 mm
Insulation thickness	29,5 mm
load Fz	0,15 kN
Length shell L	42 mm
statical load shell	0,27 N/mm²

Remark

Notice	exchange and returns are excluded. Special design on request.
Note	delivery time on demand

