


■ Insulated pipe clamp Husky VI 32 168,3 mm Insulation 44,4 M10/M12

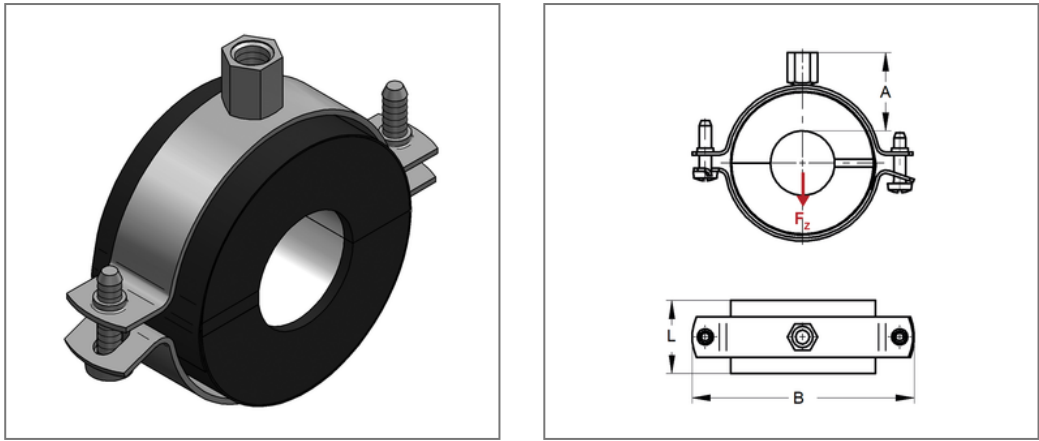

Commercial details

Part no.	6851680
EAN/GTIN	4250928441089
Packing unit	2 pcs
Quantity unit	pcs
Weight	1,36 kg/pc
Product group	06-685
Price unit	1

QR code



Certification



Specification

Application area	A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping
Insulation body	KA/PU

Technical data

Material	Steel
Material type	S235
Material coat	Plastic
Surface	galvanized
Class	B2
min. temperature resistance	-45 °C
max. temperature resistance	105 °C
Thermal conductivity	0,029 W/mK
Density shell	120 kg/m³
Water vapour diffusion resistance	20000 µ

Product details

Connection	M10/M12
Connection height A	70 mm
Width B	331 mm
Insulation thickness	44,4 mm
load Fz	1,86 kN
Length shell L	51 mm
statical load shell	0,27 N/mm²

Remark

Notice exchange and returns are excluded. Special design on request.

