


■ Insulated pipe clamp Husky VI 32 323,9 mm Insulation 50 M16

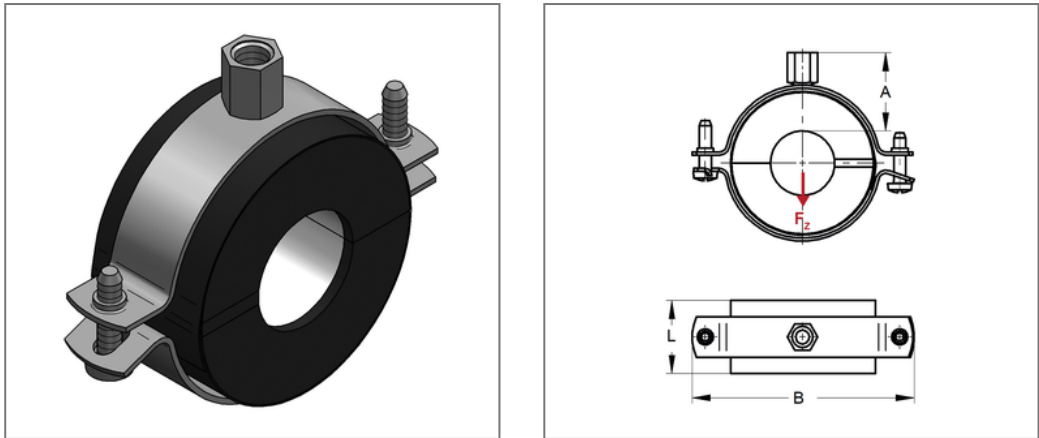

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 68532404      |
| EAN/GTIN      | 4250928441119 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 3,64 kg/pc    |
| Product group | 06-685        |
| Price unit    | 1             |

QR code



Certification



Specification

|                  |                                                                                                                                                                                      |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application area | A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping |
| Insulation body  | KA/PU                                                                                                                                                                                |

Technical data

|                                   |            |
|-----------------------------------|------------|
| Material                          | Steel      |
| Material type                     | S235       |
| Material coat                     | Plastic    |
| Surface                           | galvanized |
| Class                             | B2         |
| min. temperature resistance       | -45 °C     |
| max. temperature resistance       | 105 °C     |
| Thermal conductivity              | 0,029 W/mK |
| Density shell                     | 120 kg/m³  |
| Water vapour diffusion resistance | 20000 µ    |

Product details

|                      |            |
|----------------------|------------|
| Connection           | M16        |
| Connection height A  | 67 mm      |
| Width B              | 505 mm     |
| Insulation thickness | 50 mm      |
| load Fz              | 4,95 kN    |
| Length shell L       | 66 mm      |
| statical load shell  | 0,27 N/mm² |

Remark

|        |                                                               |
|--------|---------------------------------------------------------------|
| Notice | exchange and returns are excluded. Special design on request. |
| Note   | delivery time on demand                                       |

