


■ Insulated pipe clamp RG80 ALU/PU 33,7 mm Insulation 20 x 100 mm M8/M10

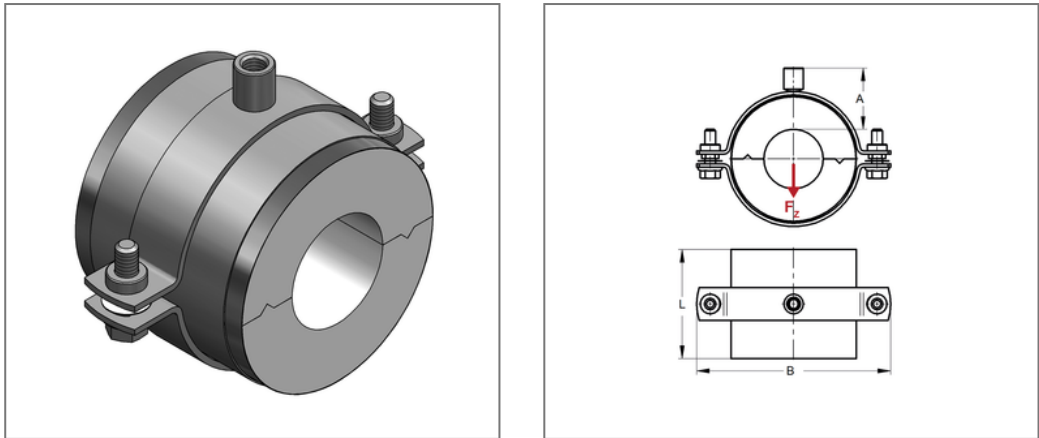

Commercial details

Part no.	75603445/B
EAN/GTIN	4250928443410
Packing unit	1 pcs
Quantity unit	pcs
Weight	0,417 kg/pc
Product group	06-756
Price unit	1

QR code



Certification



Specification

Application area	A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping
Insulation body	ALU/PU

Technical data

Material	Steel
Material type	S235
Material coat	Aluminum foil
Surface	galvanized
Class	B2
min. temperature resistance	-80 °C
max. temperature resistance	120 °C
Thermal conductivity	0,025 W/mK
Density shell	80 kg/m³
Density coat	2700 kg/m³
Thicknes coat	0,08 mm
Water vapour diffusion resistance	18750 µ

Product details

Connection	M8/M10
Connection height A	44 mm
Width B	129 mm
Insulation thickness	20 mm
load Fz	0,5 kN
Length shell L	100 mm
statical load shell	0,1 N/mm²

Remark

Delivery time	5 working days, ex works
Notice	exchange and returns are excluded.

