


Insulated pipe clamp RG80s ALU/PU 139,7 mm Insulation 20 x 100 mm M10/  
M12

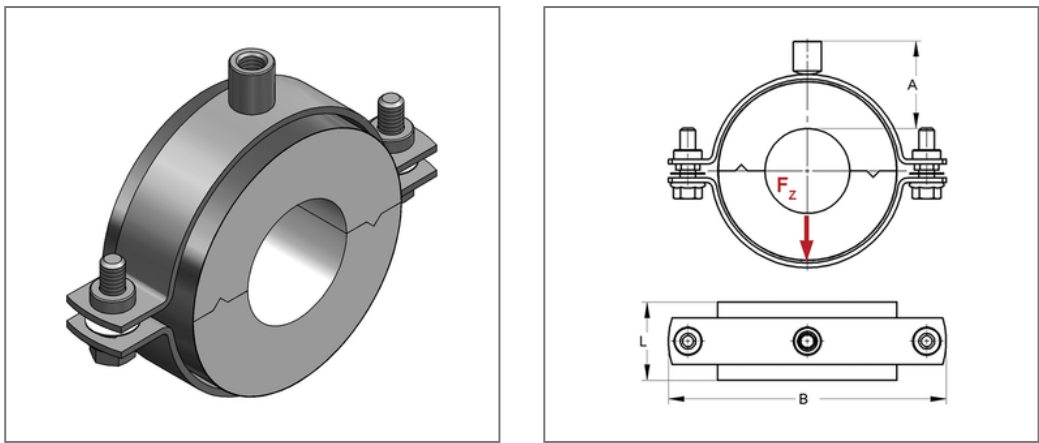

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 75614042      |
| EAN/GTIN      | 4250928443687 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 0,673 kg/pc   |
| Product group | 06-756        |
| Price unit    | 1             |

QR code



Certification



Specification

|                  |                                                                                                                                                                                      |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application area | A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping |
| Insulation body  | ALU/PU                                                                                                                                                                               |

Technical data

|                                   |               |
|-----------------------------------|---------------|
| Material                          | Steel         |
| Material type                     | S235          |
| Material coat                     | Aluminum foil |
| Surface                           | galvanized    |
| Class                             | B2            |
| min. temperature resistance       | -50 °C        |
| max. temperature resistance       | 120 °C        |
| Thermal conductivity              | 0,025 W/mK    |
| Density shell                     | 80 kg/m³      |
| Density coat                      | 2700 kg/m³    |
| Thicknes coat                     | 0,08 mm       |
| Water vapour diffusion resistance | 18750 µ       |

Product details

|                      |         |
|----------------------|---------|
| Connection           | M10/M12 |
| Connection height A  | 45 mm   |
| Width B              | 252 mm  |
| Insulation thickness | 20 mm   |
| load Fz              | 0,8 kN  |
| Length shell L       | 100 mm  |

Remark

|               |                                    |
|---------------|------------------------------------|
| Delivery time | 5 working days, ex works           |
| Notice        | exchange and returns are excluded. |

# Product details

|                     |           |
|---------------------|-----------|
| statical load shell | 0,1 N/mm² |
|---------------------|-----------|

