


Insulated pipe clamp RG80s ALU/PU 168,3 mm Insulation 20 x 100 mm M10/
M12

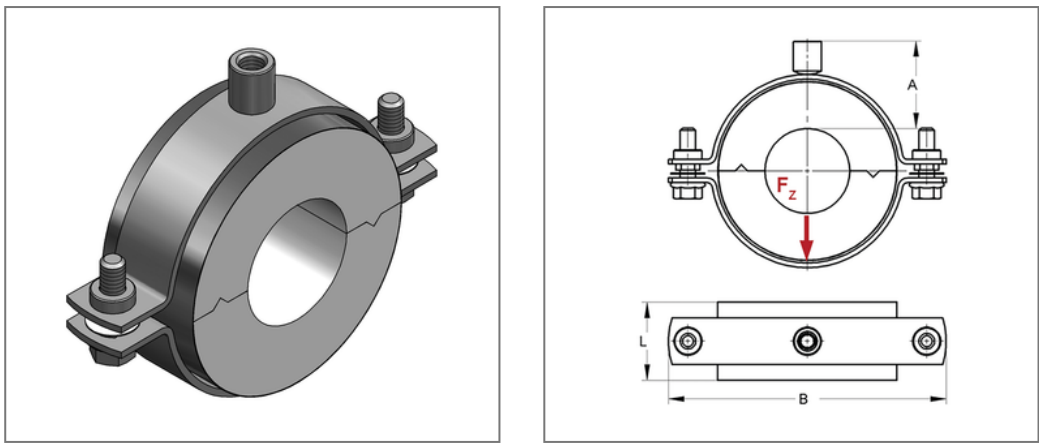

Commercial details

Part no.	75616842
EAN/GTIN	4250928443762
Packing unit	1 pcs
Quantity unit	pcs
Weight	0,774 kg/pc
Product group	06-756
Price unit	1

QR code



Certification



Specification

Application area	A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping
Insulation body	ALU/PU

Technical data

Material	Steel
Material type	S235
Material coat	Aluminum foil
Surface	galvanized
Class	B2
min. temperature resistance	-50 °C
max. temperature resistance	120 °C
Thermal conductivity	0,025 W/mK
Density shell	80 kg/m³
Density coat	2700 kg/m³
Thicknes coat	0,08 mm
Water vapour diffusion resistance	18750 µ

Product details

Connection	M10/M12
Connection height A	45 mm
Width B	288 mm
Insulation thickness	20 mm
load Fz	1,1 kN
Length shell L	100 mm

Remark

Delivery time	5 working days, ex works
Notice	exchange and returns are excluded.

Product details

statical load shell	0,1 N/mm ²
---------------------	-----------------------