


■ Drop-in Anchor ES V4A M12 x 50

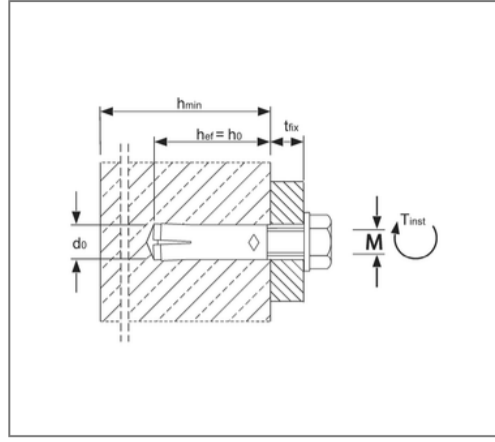

Commercial details

| | |
|---------------|---------------|
| Part no. | 211805350501 |
| EAN/GTIN | 4250928448767 |
| Packing unit | 50 pcs |
| Quantity unit | pcs |
| Weight | 0,0430 kg/pc |
| Product group | 07-211 |
| Price unit | 100 |

QR code



Certification



Specification

| | |
|------------------|---|
| Application area | For cracked concrete (multiple fixings) and non-cracked concrete from C20/25 to C50/60 for e.g. suspensions in the heating, sanitary and ventilation sector or anchoring with threaded rods and screws in conjunction with flat steel or sectional steel. |
| Brand | MKT |

Technical data

| | |
|---------------|-----------------|
| Material | Stainless steel |
| Material type | V4A |

Product details

| | |
|----------------------|-------|
| Thread | M12 |
| Length of thread | 18 mm |
| Drill diameter | 15 mm |
| Drilling hole depth | 50 mm |
| min. embedment depth | 13 mm |
| max. embedment depth | 18 mm |

Remark

| | |
|---------------|--------------------------------|
| Delivery time | V4A - 2 working days, ex works |
|---------------|--------------------------------|