


■ Conical stud VMU plus A M8 V4A Length 130 mm

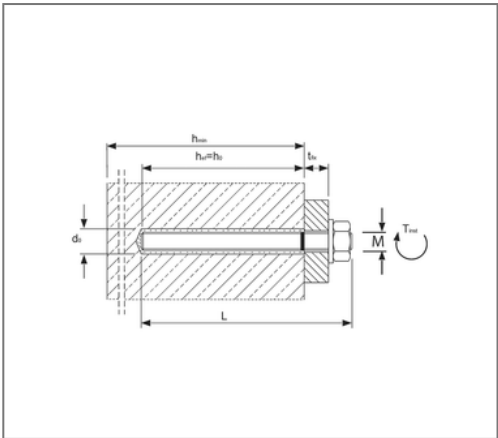

Commercial details

Part no.	222831525501
EAN/GTIN	4043315065155
Packing unit	10 pcs
Quantity unit	pcs
Weight	0,0520 kg/pc
Product group	07-222
Price unit	100

QR code



Certification



Specification

Brand	MKT
Application area	For non-cracked concrete C20/25 to C50/60, perforated brick and solid brick.
Fire protection	yes
Application area	Concrete, solid and perforated brick

Technical data

Material	Stainless steel
Material type	V4A
Strength class	5.8

Product details

Thread	M8
Length	130 mm
Wrench size	13
Tightening torque	10 Nm
Length dowel	130 mm
Drill diameter concrete	10 mm
Drill diameter solid brick	10 mm
Drilling hole depth concrete	80 mm
Drilling hole depth solid brick	80 mm
max. clamping thickness concrete	40 mm
max. clamping thickness solid brick	40 mm
max. clamping thickness with perfo sleeve 16x85	35 mm

Remark

Delivery time	3 working days, ex works
Notice	Request for available sleeve.