


■ Conical stud VMU plus A M10 V4A Length 165 mm

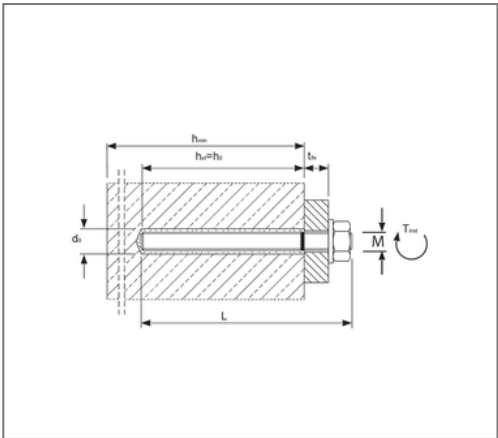

Commercial details

Part no.	222831635501
EAN/GTIN	4043315064530
Packing unit	10 pcs
Quantity unit	pcs
Weight	0,102 kg/pc
Product group	07-222
Price unit	100

QR code



Certification



Specification

Brand	MKT
Application area	For non-cracked concrete C20/25 to C50/60, perforated brick and solid brick.
Fire protection	yes
Application area	Concrete, solid and perforated brick

Technical data

Material	Stainless steel
Material type	V4A
Strength class	5.8

Product details

Thread	M10
Length	165 mm
Wrench size	17
Tightening torque	20 Nm
Length dowel	165 mm
Drill diameter concrete	12 mm
Drill diameter solid brick	12 mm
Drilling hole depth concrete	90 mm
Drilling hole depth solid brick	90 mm
max. clamping thickness concrete	65 mm
max. clamping thickness solid brick	65 mm
max. clamping thickness with perfo sleeve 16x130	25 mm
max. clamping thickness with perfo sleeve 16x85	70 mm

Remark

Delivery time	3 working days, ex works
---------------	--------------------------



Remark

Notice	Request for available sleeve.
--------	-------------------------------

