


■ Conical stud VMU plus A M12 V4A Length 210 mm

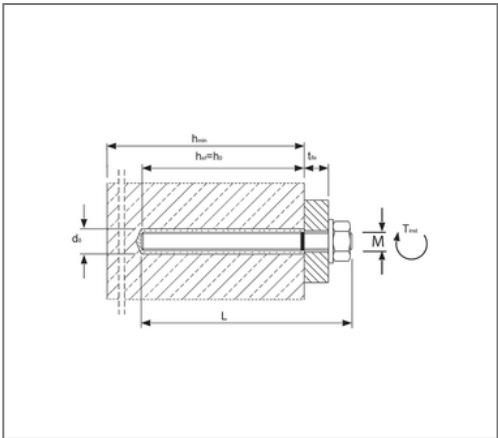

Commercial details

Part no.	222831740501
EAN/GTIN	4043315064721
Packing unit	10 pcs
Quantity unit	pcs
Weight	0,182 kg/pc
Product group	07-222
Price unit	100

QR code



Certification



Specification

Brand	MKT
Application area	For non-cracked concrete C20/25 to C50/60, perforated brick and solid brick.
Fire protection	yes
Application area	Concrete, solid and perforated brick

Technical data

Material	Stainless steel
Material type	V4A
Strength class	5.8

Product details

Thread	M12
Length	210 mm
Wrench size	19
Tightening torque	40 Nm
Length dowel	210 mm
Drill diameter concrete	14 mm
Drill diameter solid brick	14 mm
Drilling hole depth concrete	110 mm
Drilling hole depth solid brick	90 mm
max. clamping thickness concrete	85 mm
max. clamping thickness solid brick	95 mm
max. clamping thickness with perfo sleeve 20x130	65 mm
max. clamping thickness with perfo sleeve 20x85	110 mm

Remark

Delivery time	3 working days, ex works
---------------	--------------------------



Remark

Notice	Request for available sleeve.
--------	-------------------------------

