


■ Conical stud VMU plus A M10 Length 150 mm

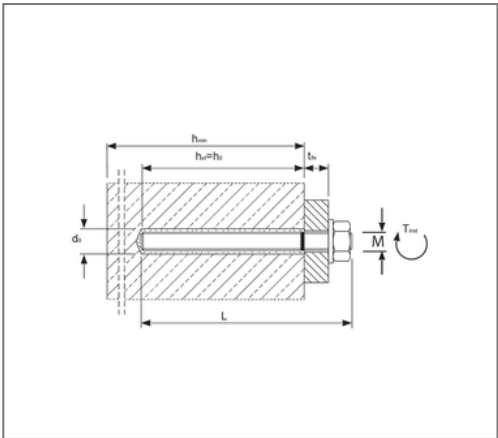

Commercial details

Part no.	221831630101
EAN/GTIN	4043315064486
Packing unit	10 pcs
Quantity unit	pcs
Weight	0,0950 kg/pc
Product group	07-221
Price unit	100

QR code



Certification



Specification

Brand	MKT
Application area	For non-cracked concrete C20/25 to C50/60, perforated brick and solid brick.
Fire protection	yes
Application area	Concrete, solid and perforated brick

Technical data

Material	Steel
Surface	galvanized
Strength class	5.8

Product details

Thread	M10
Length	150 mm
Wrench size	17
Tightening torque	20 Nm
Length dowel	150 mm
Drill diameter concrete	12 mm
Drill diameter solid brick	12 mm
Drilling hole depth concrete	90 mm
Drilling hole depth solid brick	90 mm
max. clamping thickness concrete	50 mm
max. clamping thickness solid brick	50 mm
max. clamping thickness with perfo sleeve 16x130	10 mm
max. clamping thickness with perfo sleeve 16x85	55 mm

Remark

Delivery time	3 working days, ex works
---------------	--------------------------



Remark

Notice

Request for available sleeve.