


■ Conical stud VMU plus A M16 V4A Length 160 mm

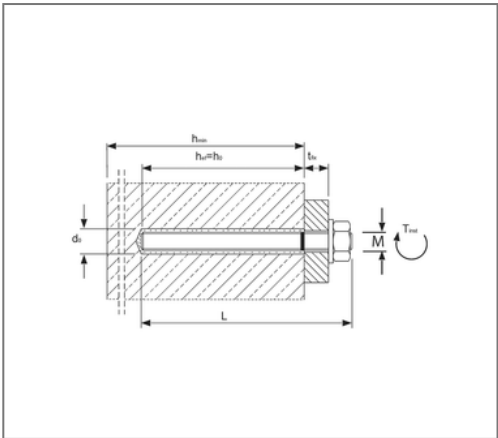

Commercial details

Part no.	222831810501
EAN/GTIN	4250928457745
Packing unit	10 pcs
Quantity unit	pcs
Weight	0,265 kg/pc
Product group	07-222
Price unit	100

QR code



Certification



Specification

Brand	MKT
Application area	For non-cracked concrete C20/25 to C50/60, perforated brick and solid brick.
Fire protection	yes
Application area	Concrete, solid and perforated brick

Technical data

Material	Stainless steel
Material type	V4A
Strength class	5.8

Product details

Thread	M16
Length	160 mm
Wrench size	24
Length dowel	160 mm
Drill diameter concrete	18 mm
Drill diameter solid brick	18 mm
Drilling hole depth concrete	125 mm
Drilling hole depth solid brick	100 mm
max. clamping thickness concrete	15 mm
max. clamping thickness solid brick	40 mm
max. clamping thickness with perfo sleeve 20x130	10 mm
max. clamping thickness with perfo sleeve 20x85	55 mm

Remark

Delivery time	3 working days, ex works
Notice	Request for available sleeve.

