


Profile rail CENTUM XL 200 WST 100 / 200 / 5 mm L= 8 m hot-dip galv.

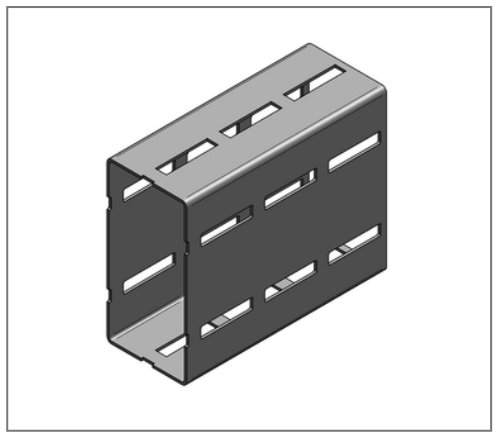

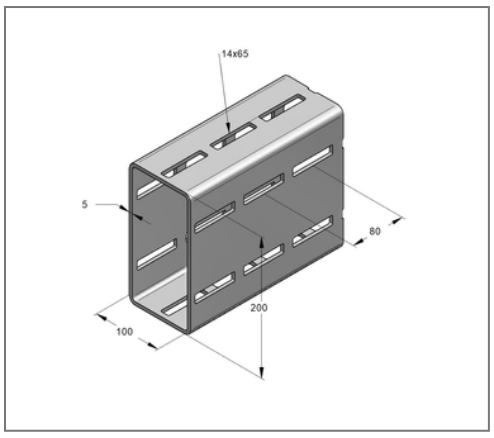

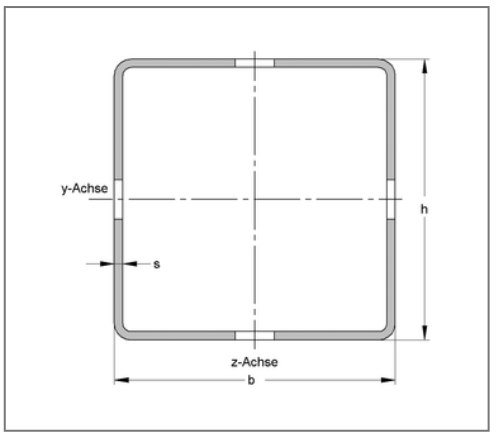

Commercial details

Part no.	16020080
EAN/GTIN	4250928449405
Packing unit	8 m
Bundle	32 m
Quantity unit	m
Weight	20,46 kg/m
Product group	14-160
Price unit	1

QR code

Certification

TSP®

CE

Specification

Application area	Heavy-duty square profile for modular industrial and plant construction.
Specification	Modular system, 4-sided without raster in connection with mounting parts, torsion stiffness, high load capacity.

Technical data

Material	Steel
Material type	S235
Surface	hot-dip galvanized
Corrosion category	C4 high / C5 medium
Surrounding area	Indoor and outdoor areas

Product details

Width	100 mm
Height	200 mm
Thickness	5 mm
Length	8 m
Elongated hole	14x65 mm
Area (least cross section of the profile rail)	24,15 cm^2
Axial angular impulse I_Y	1255,68 cm4
Axial angular impulse I_Z	433,47 cm4
Grid dimension	80 mm
Elastic limit	275 N/mm^2
Radius of inertia iy	7,21 cm
Radius of inertia iz	4,24 cm
Section modulus W_Y	125,56 cm^3

Remark

Note for delivery length 8 m please attend to special delivery conditions

MEFA Befestigungs- und Montagesysteme GmbH | Schillerstraße 15 | 74635 Kupferzell
+ 49 7944 64 0 | info@mefa.de | www.mefa.de

Product details

Section modulus W_Z	86,69 cm³

MEFA Befestigungs- und Montagesysteme GmbH | Schillerstraße 15 | 74635 Kupferzell
+ 49 7944 64 0 | info@mefa.de | www.mefa.de