


Guiding clamp Type 2A I for HEA 100-140 HEB 100-120 IPE 200-240

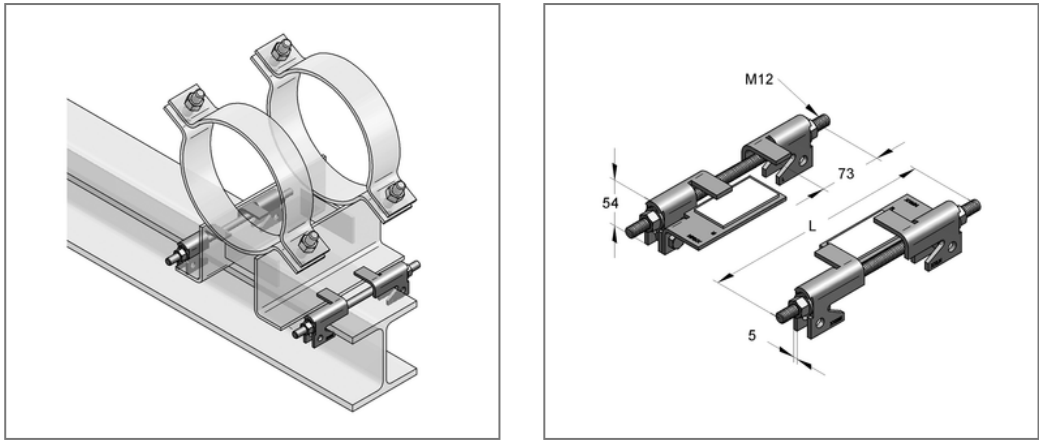

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 14710004      |
| EAN/GTIN      | 4250928432476 |
| Packing unit  | 1 set         |
| Quantity unit | set           |
| Weight        | 2,06 kg/set   |
| Product group | 14-147        |
| Price unit    | 1             |

QR code



Certification



Specification

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| Application area             | For guiding plain bearings and sliding carriages on steel girders. |
| Number of PE sliding stripes | 2                                                                  |

Technical data

|                             |                    |
|-----------------------------|--------------------|
| Material                    | Steel              |
| Material type               | S235               |
| Surface                     | hot-dip galvanized |
| Safety factor               | 1,54               |
| Tightening torque           | 64 Nm              |
| min. temperature resistance | -200 °C            |
| max. temperature resistance | 80 °C              |

Product details

|                              |                |
|------------------------------|----------------|
| Type                         | with lift lock |
| Threaded rod type            | M12 x 220      |
| load F <sub>z</sub>          | 3,5 kN         |
| load F <sub>x</sub>          | 4 kN           |
| max. thickness sliding plate | 12 mm          |
| for beam HEA                 | 100-140        |
| for beam HEB                 | 100-120        |
| for beam IPE                 | 200-240        |
| Static friction factor       | 0,15           |

Remark

|               |           |
|---------------|-----------|
| Delivery time | on demand |
|---------------|-----------|