


■ Profile rail C-profile double V2A 45 / 90 / 2 mm L= 6 m

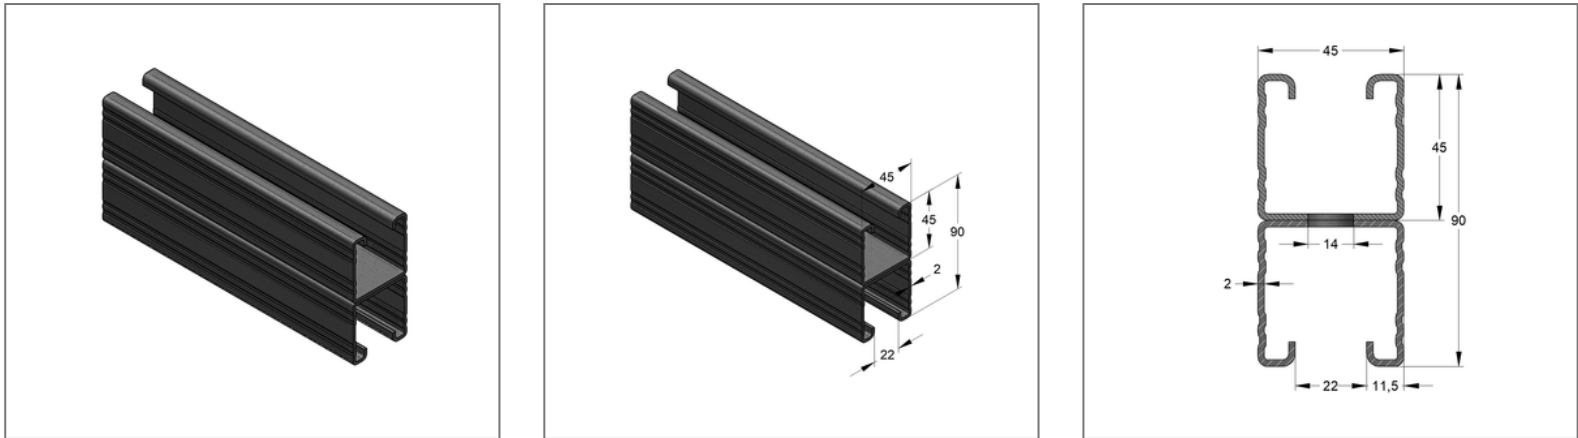

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 080007001     |
| EAN/GTIN      | 4250928457325 |
| Packing unit  | 24 m          |
| Bundle        | 120 m         |
| Quantity unit | m             |
| Weight        | 4,99 kg/m     |
| Product group | 13-048        |
| Price unit    | 1             |

QR code



Certification



Specification

|                  |                                             |
|------------------|---------------------------------------------|
| Application area | Medium weight stainless steel profile rail. |
| Specification    | untoothed, perforated and welded            |

Technical data

|               |                 |
|---------------|-----------------|
| Material      | Stainless steel |
| Material type | V2A             |

Product details

|                                                |                       |
|------------------------------------------------|-----------------------|
| Width                                          | 45 mm                 |
| Height                                         | 90 mm                 |
| Thickness                                      | 2 mm                  |
| Length                                         | 6 m                   |
| Hole-Ø                                         | 14 mm                 |
| Elongated hole                                 | 14x45 mm              |
| Area (least cross section of the profile rail) | 5,7 cm²               |
| Axial angular impulse I <sub>y</sub>           | 43,27 cm <sup>4</sup> |
| Axial angular impulse I <sub>z</sub>           | 20,77 cm <sup>4</sup> |
| Grid dimension                                 | 105,0 mm              |
| Rail slot width                                | 22 mm                 |
| Centroid distance e <sub>o</sub>               | 4,5 cm                |
| Centroid distance e <sub>u</sub>               | 4,5 cm                |
| Centroid distance e <sub>z</sub>               | 2,25 cm               |
| Elastic limit                                  | 230 N/mm²             |
| Radius of inertia i <sub>y</sub>               | 2,75 cm               |

Remark

|        |                   |
|--------|-------------------|
| Notice | Full bundle, only |
|--------|-------------------|



Product details

|                                |                      |
|--------------------------------|----------------------|
| Radius of inertia iz           | 1,91 cm              |
| Section modulus W <sub>Y</sub> | 9,61 cm <sup>3</sup> |
| Section modulus W <sub>Z</sub> | 9,23 cm <sup>3</sup> |

