
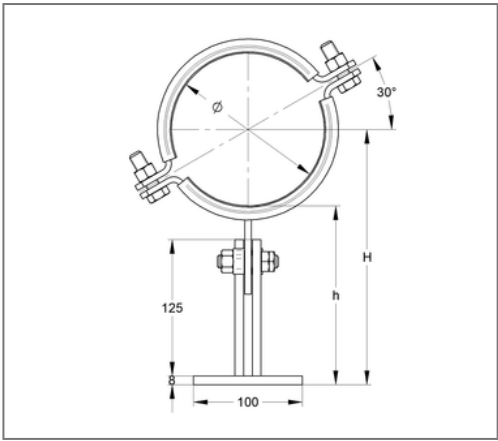
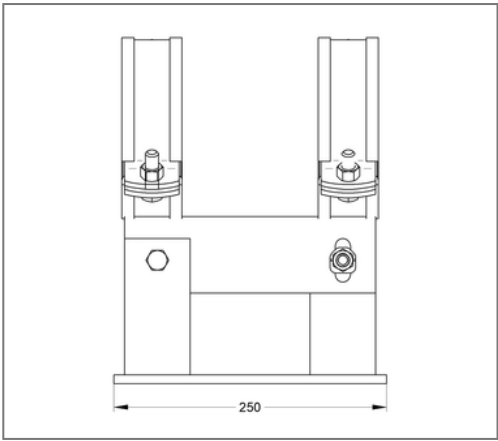


■ Sliding support T 2 PC HV3 50x5 210 mm TPE 100x250 mm hot-dip galv.

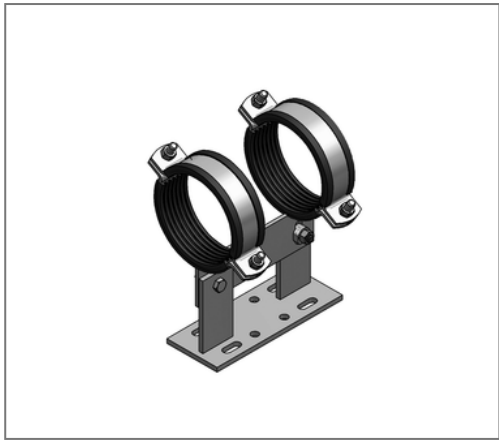

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 141cfbb0210   |
| EAN/GTIN      | 4250928461551 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 7,91 kg/pc    |
| Product group | 14-144        |
| Price unit    | 1             |

QR code



Specification

|                   |                     |
|-------------------|---------------------|
| Specification     | T-support           |
| Closure           | Nut / closure screw |
| Tightening torque | 80 Nm               |

Technical data

|                             |                    |
|-----------------------------|--------------------|
| Material                    | Steel              |
| Material type               | S235               |
| Surface                     | hot-dip galvanized |
| Sound insulation lining     | TPE                |
| Safety factor               | 1,54               |
| min. temperature resistance | -35 °C             |
| max. temperature resistance | 100 °C             |

Product details

|                                    |          |
|------------------------------------|----------|
| Material thickness                 | 8 mm     |
| Width pipe clamp strap             | 50 mm    |
| Thickness clamp strap              | 5 mm     |
| Width substructure                 | 100 mm   |
| Length of substructure             | 250 mm   |
| load F <sub>x</sub>                | 1,98 kN  |
| load F <sub>y</sub>                | 5 kN     |
| load F <sub>z</sub> hanging μ 0,2  | 9,77 kN  |
| load F <sub>z</sub> hanging μ 0,3  | 9,77 kN  |
| load F <sub>z</sub> standing μ 0,2 | 19,53 kN |
| load F <sub>z</sub> standing μ 0,3 | 16,67 kN |
| min. height base                   | 150 mm   |

## Product details

|                   |        |
|-------------------|--------|
| max. height base  | 175 mm |
| min. tubular axle | 256 mm |
| max. tubular axle | 282 mm |