
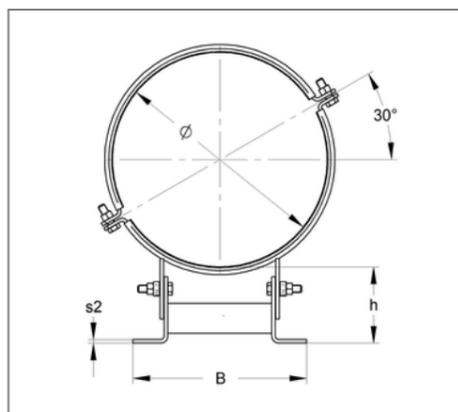
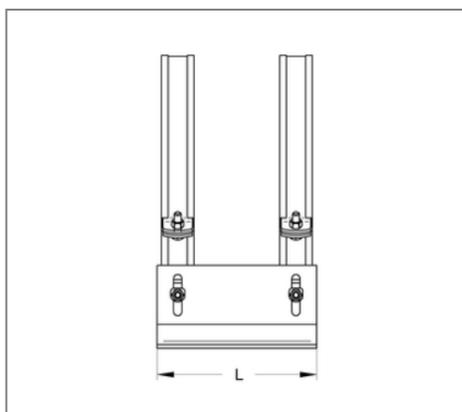


■ Sliding sledge A HV 100-150 50x5 508 mm EPDM hot-dip galv.

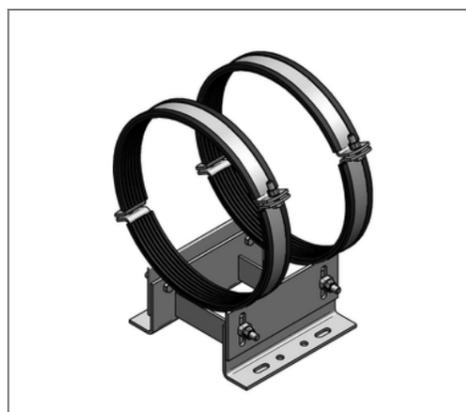

Commercial details

| | |
|---------------|---------------|
| Part no. | 142afb0508 |
| EAN/GTIN | 4250928462978 |
| Packing unit | 1 pcs |
| Quantity unit | pcs |
| Weight | 25,89 kg/pc |
| Product group | 14-143 |
| Price unit | 1 |

QR code



Specification

| | |
|---------------|---------------------|
| Specification | Double-L-support |
| Closure | Nut / closure screw |

Technical data

| | |
|-----------------------------|--------------------------|
| Material | Steel |
| Material type | S235 |
| Surface | hot-dip galvanized |
| Corrosion category | C4 high / C5 medium |
| Surrounding area | Indoor and outdoor areas |
| Sound insulation lining | Rubber EPDM |
| Safety factor | 1,54 |
| min. temperature resistance | -35 °C |
| max. temperature resistance | 100 °C |

Product details

| | |
|------------------------------|----------|
| Closure screw | M12 |
| Outer pipe diameter | 508 mm |
| Material thickness | 8 mm |
| Width pipe clamp strap | 50 mm |
| Width substructure | 370 mm |
| Length of substructure | 390 mm |
| Load F_x | 10,45 kN |
| Load F_y | 5 kN |
| Load F_z hanging μ 0,2 | 21,89 kN |
| Load F_z hanging μ 0,3 | 16,67 kN |

Product details

| | |
|-------------------------------|----------|
| Load F_z standing μ 0,2 | 25 kN |
| Load F_z standing μ 0,3 | 16,67 kN |
| Thickness clamp strap | 5 mm |
| min. height base | 100 mm |
| max. height base | 155 mm |
| Insulation thickness | 6 mm |