
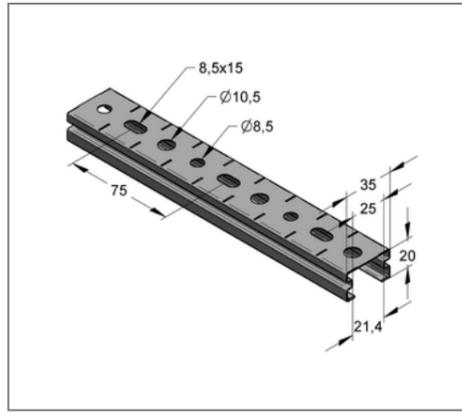


■ Profile rail C-profile Stex 35 / 20 / 0,8 mm L= 3 m pre-galv.

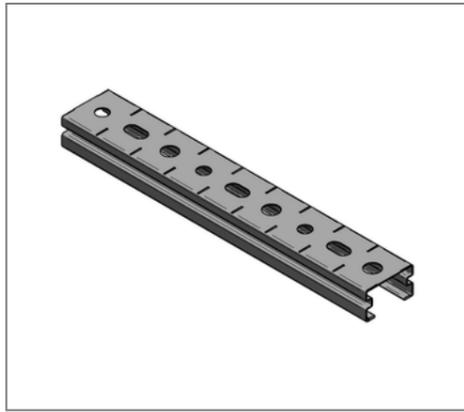

Commercial details

Part no.	1273523
EAN/GTIN	4250928424426
Packing unit	54 m
Bundle	504 m
Quantity unit	m
Weight	0,640 kg/m
Product group	02-127
Price unit	1

QR code



Certification



Specification

Application area	Lightweight profile rail with quick connection option.
Specification	Marking for fit-up aid and to cut rails
Type of attachment	glide fast connection

Product details

Width	35 mm
Height	20 mm
Thickness	0,8 mm
Length	3 m
Hole-Ø	8,5 mm
Hole diameter 1	8,5 mm
Hole diameter 2	10,5 mm
Elongated hole	8,5x15 mm
Area (least cross section of the profile rail)	0,74 cm ²
Axial angular impulse I _y	0,4 cm ⁴
Axial angular impulse I _z	1,53 cm ⁴
Grid dimension	25 mm
Rail slot width	21 mm

Technical data

Material	Steel
Material type	S250
Surface	pre-galvanized
Corrosion category	C4 high / C5 medium
Surrounding area	Indoor and outdoor areas

Remark

Notice	Full bundles, only
--------	--------------------

Product details

Centroid distance e_o	0,97 cm
Centroid distance e_u	1,03 cm
Centroid distance e_z	1,75 cm
Elastic limit	250 N/mm ²
Radius of inertia i_y	0,74 cm
Radius of inertia i_z	1,44 cm
Section modulus W_y	0,39 cm ³
Section modulus W_z	0,87 cm ³