


## ■ Profile rail C-profile Stex 35 / 35 / 1 mm L= 2 m pre-galv.

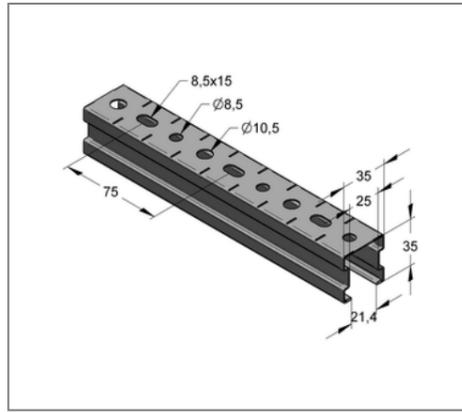

### Commercial details

Part no.	1273538
EAN/GTIN	4250928424433
Packing unit	12 m
Bundle	252 m
Quantity unit	m
Weight	1,03 kg/m
Product group	02-127
Price unit	1

### QR code



### Certification



### Specification

Application area	Lightweight profile rail with quick connection option.
Specification	Marking for fit-up aid and to cut rails
Type of attachment	glide fast connection

### Product details

Width	35 mm
Height	35 mm
Thickness	1 mm
Length	2 m
Hole-Ø	8,5 mm
Hole diameter 1	8,5 mm
Hole diameter 2	10,5 mm
Elongated hole	8,5x15 mm
Area (least cross section of the profile rail)	1,03 cm <sup>2</sup>
Axial angular impulse I <sub>y</sub>	1,86 cm <sup>4</sup>
Axial angular impulse I <sub>z</sub>	2,21 cm <sup>4</sup>
Grid dimension	25 mm
Rail slot width	21 mm

### Technical data

Material	Steel
Material type	S250
Surface	pre-galvanized
Corrosion category	C4 high / C5 medium
Surrounding area	Indoor and outdoor areas

### Remark

Notice	Full bundles, only
--------	--------------------

## Product details

Centroid distance $e_o$	1,72 cm
Centroid distance $e_u$	1,78 cm
Centroid distance $e_z$	1,75 cm
Elastic limit	250 N/mm <sup>2</sup>
Radius of inertia $i_y$	1,34 cm
Radius of inertia $i_z$	1,46 cm
Section modulus $W_y$	1,04 cm <sup>3</sup>
Section modulus $W_z$	1,26 cm <sup>3</sup>