
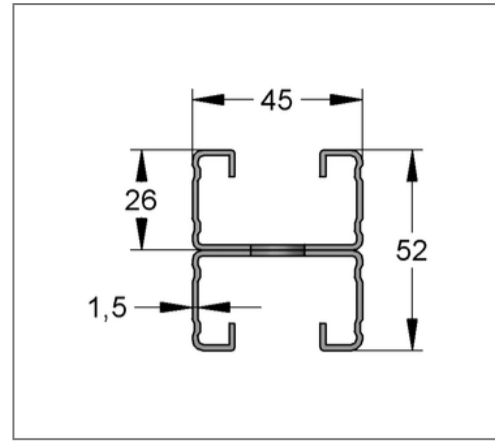
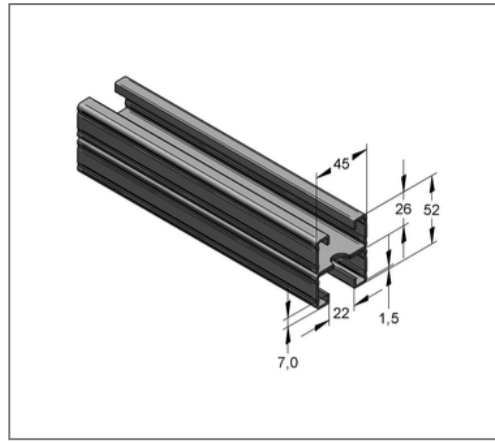


## ■ Profile rail C-profile double 45 / 52 / 1,5 mm L= 6 m pre-galv.

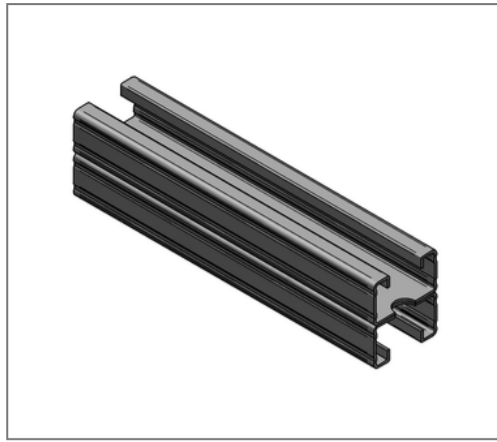

### Commercial details

Part no.	08215262
EAN/GTIN	4250928420794
Packing unit	30 m
Bundle	240 m
Quantity unit	m
Weight	2,69 kg/m
Product group	02-082
Price unit	1

### QR code



### Certification



### Specification

Application area	Medium weight mounting rail with quick connection option.
Specification	Toothed C-profile rail. Double rails are perforated and welded.
Type of attachment	form-locking connection

### Product details

Width	45 mm
Height	52 mm
Thickness	1,5 mm
Length	6 m
Hole-Ø	14,00 mm
Elongated hole	14x45 mm
Area (least cross section of the profile rail)	2,99 cm <sup>2</sup>
Axial angular impulse I <sub>y</sub>	8,19 cm <sup>4</sup>
Axial angular impulse I <sub>z</sub>	10,30 cm <sup>4</sup>
Grid dimension	105,0 mm
Rail slot width	22 mm
Centroid distance e <sub>o</sub>	2,60 cm

### Technical data

Material	Steel
Material type	S250
Surface	pre-galvanized
TSP	no
Corrosion category	C4 high / C5 medium
Surrounding area	Indoor and outdoor areas

### Remark

Notice	Full bundles, only
--------	--------------------

## Product details

Centroid distance $e_u$	2,60 cm
Centroid distance $e_z$	2,25 cm
Elastic limit	250 N/mm <sup>2</sup>
Radius of inertia $i_y$	1,66 cm
Radius of inertia $i_z$	1,86 cm
Section modulus $W_Y$	3,15 cm <sup>3</sup>
Section modulus $W_Z$	4,58 cm <sup>3</sup>