
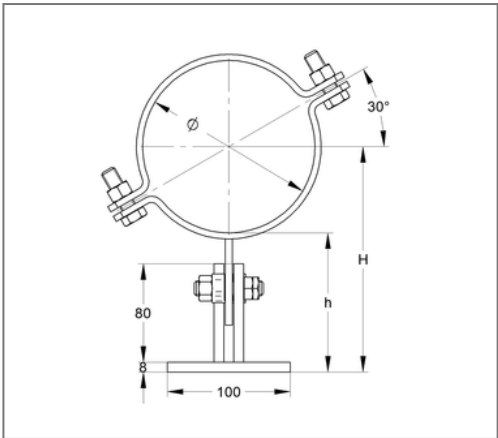
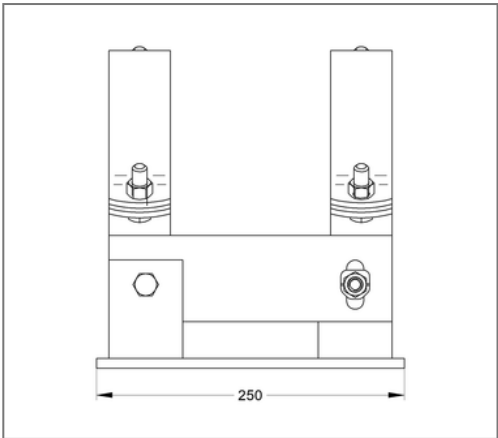


■ Sliding support T 2 PC HV1 50x5 89 mm unlined 100x250 mm hot-dip galv.

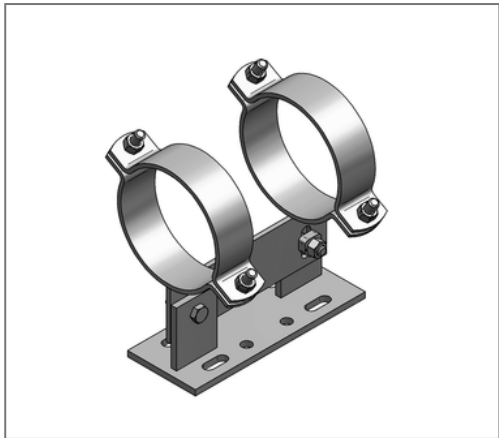

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 141afba0089   |
| EAN/GTIN      | 4250928460363 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 5,23 kg/pc    |
| Product group | 14-144        |
| Price unit    | 1             |

QR code



Specification

|                   |                     |
|-------------------|---------------------|
| Specification     | T-support           |
| Closure           | Nut / closure screw |
| Tightening torque | 80 Nm               |

Technical data

|                         |                    |
|-------------------------|--------------------|
| Material                | Steel              |
| Material type           | S235               |
| Surface                 | hot-dip galvanized |
| Sound insulation lining | unlined            |
| Safety factor           | 1,54               |

Product details

|                        |          |
|------------------------|----------|
| Material thickness     | 8 mm     |
| Width pipe clamp strap | 50 mm    |
| Thickness clamp strap  | 5 mm     |
| Width substructure     | 100 mm   |
| Length of substructure | 250 mm   |
| load $F_x$             | 4,94 kN  |
| load $F_y$             | 10 kN    |
| load $F_z$ hanging     | 9,77 kN  |
| load $F_z$ standing    | 19,53 kN |
| min. height base       | 100 mm   |
| max. height base       | 125 mm   |
| min. tubular axle      | 145 mm   |
| max. tubular axle      | 171 mm   |