
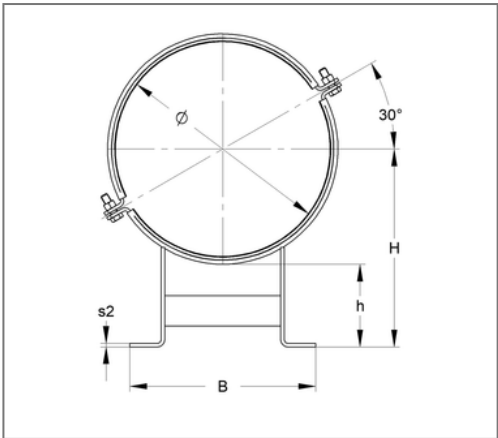


■ Sliding sledge B 50 x 5 mm 450 mm EPDM hot-dip galv.

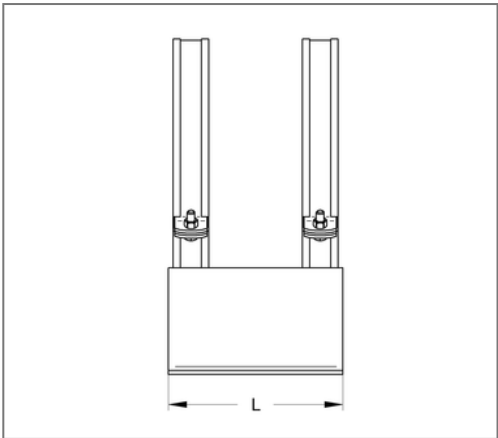

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 110bfb0450    |
| EAN/GTIN      | 4250928462305 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 17,81 kg/pc   |
| Product group | 14-108        |
| Price unit    | 1             |

QR code



Specification

|               |                  |
|---------------|------------------|
| Specification | Double-L-support |
| Closure       | Screw + nut      |

Technical data

|                             |                    |
|-----------------------------|--------------------|
| Material                    | Steel              |
| Material type               | S235               |
| Surface                     | hot-dip galvanized |
| Insulation thickness        | 6 mm               |
| min. temperature resistance | -35 °C             |
| max. temperature resistance | 100 °C             |
| Sound insulation lining     | Rubber EPDM        |
| Safety factor               | 1,54               |

Product details

|                                    |          |
|------------------------------------|----------|
| Closure screw                      | M12      |
| Outer pipe diameter                | 450 mm   |
| Axis height                        | 375 mm   |
| Material thickness                 | 8 mm     |
| Width pipe clamp strap             | 50 mm    |
| Width substructure                 | 332 mm   |
| Length of substructure             | 270 mm   |
| load F <sub>x</sub>                | 6,6 kN   |
| load F <sub>y</sub>                | 5 kN     |
| load F <sub>z</sub> standing μ 0,2 | 25 kN    |
| load F <sub>z</sub> standing μ 0,3 | 16,67 kN |



Product details

|                                   |          |
|-----------------------------------|----------|
| load F <sub>Z</sub> hanging μ 0,2 | 15,15 kN |
| load F <sub>Z</sub> hanging μ 0,3 | 15,15 kN |
| Thickness clamp strap             | 5 mm     |

