
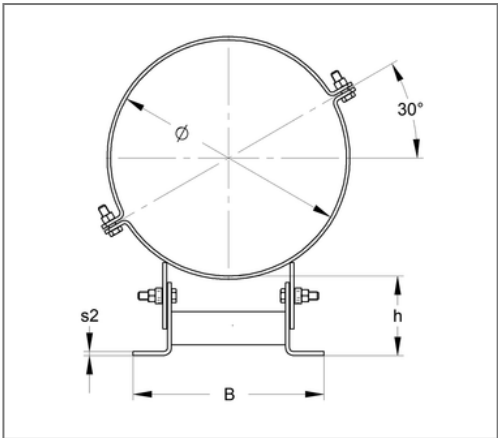
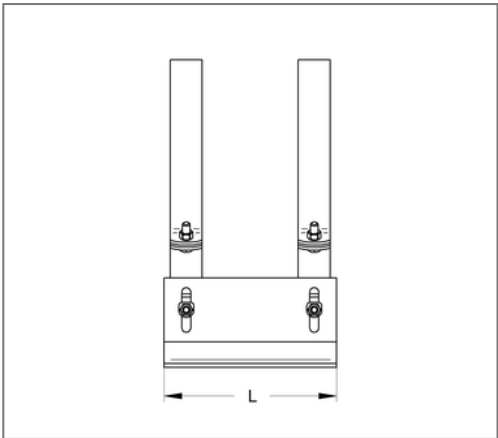


■ Sliding sledge A HV 100-150 70x10 711 mm unlined hot-dip galv.

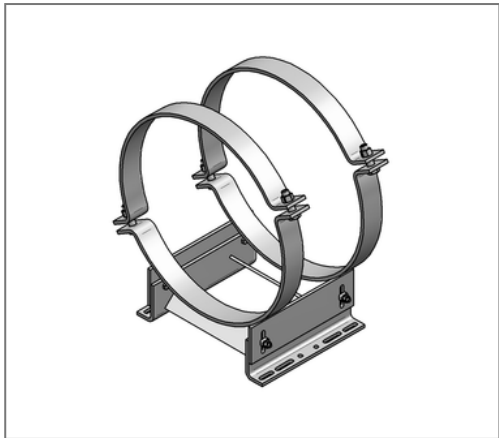

Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 142afa0711    |
| EAN/GTIN      | 4250928462671 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 52,32 kg/pc   |
| Product group | 14-143        |
| Price unit    | 1             |

QR code



Specification

|               |                     |
|---------------|---------------------|
| Specification | Double-L-support    |
| Closure       | Nut / closure screw |

Technical data

|                         |                    |
|-------------------------|--------------------|
| Material                | Steel              |
| Material type           | S235               |
| Surface                 | hot-dip galvanized |
| Sound insulation lining | unlined            |
| Safety factor           | 1,54               |

Product details

|                              |         |
|------------------------------|---------|
| Closure screw                | M20     |
| Outer pipe diameter          | 711 mm  |
| Material thickness           | 10 mm   |
| Width pipe clamp strap       | 70 mm   |
| Width substructure           | 468 mm  |
| Length of substructure       | 390 mm  |
| load F <sub>x</sub>          | 16,8 kN |
| load F <sub>y</sub>          | 40 kN   |
| load F <sub>z</sub> hanging  | 34,2 kN |
| load F <sub>z</sub> standing | 40 kN   |
| Thickness clamp strap        | 10 mm   |
| min. height base             | 91 mm   |
| max. height base             | 151 mm  |